
ASEC Products
Marketing 17
6921 RE Duiven
The Netherlands
T. +31 316 84 44 01
info@asecproducts.com
www.asecproducts.com

Datasheet AIPromatectH

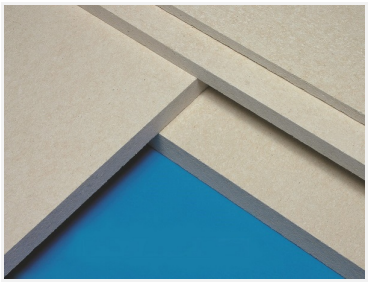

ASPROMATECTH is composed of calcium silicates, cement and additives. The board is incombustible and water-resistant. Suitable for fire resistant covering of steel constructions.

Application

Fire-resistant cladding for steel construction, fire-resistant concrete protection

Material

Composed of calcium silicates, cement and additives.

Availablity

	Value	Unit
Sheet thickness	6, 8, 10, 12, 15, 18, 20, 25	mm
Sheet size	1250x2500/3000	mm

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.

ASEC Products
Marketing 17
6921 RE Duiven
The Netherlands
T. +31 316 84 44 01
info@asecproducts.com
www.asecproducts.com

AlPromatectH - Specifications

Physical properties

	Test standard	Value	Unit
Thermal conductivity		0,175	W/m°K

Mechanical properties

	Test standard	Value	Unit

Thermal properties

	Test standard	Value	Unit

Friction properties

	Test standard	Value	Unit

Electrical properties

	Test standard	Value	Unit

The information in this datasheet is provided for general purposes only and not meant to be a specific recommendation for any individual application. All values were determined under laboratory conditions. ASEC Products is not directly neither indirectly responsible for any claim resulting from the use of any information provided in this datasheet.
ASEC Products 2022 ©.